

Walker 2030 Mk2



Wind Speed and Direction System

The Walker 2030 uses a Combined Anemometer Cup & Vane Direction Sensor, the P296. This gives high accuracy in a robust compact package!


The Sensor connects directly to a standard Walker DIN 96 x 96 wind speed & direction indicator, the P1251, which gives digital displays of relative wind speed & direction.

True wind systems are available by using this sensor with the Walker P1066 True Wind Interface Unit.

Proven Accuracy and Reliability



EST. 1838

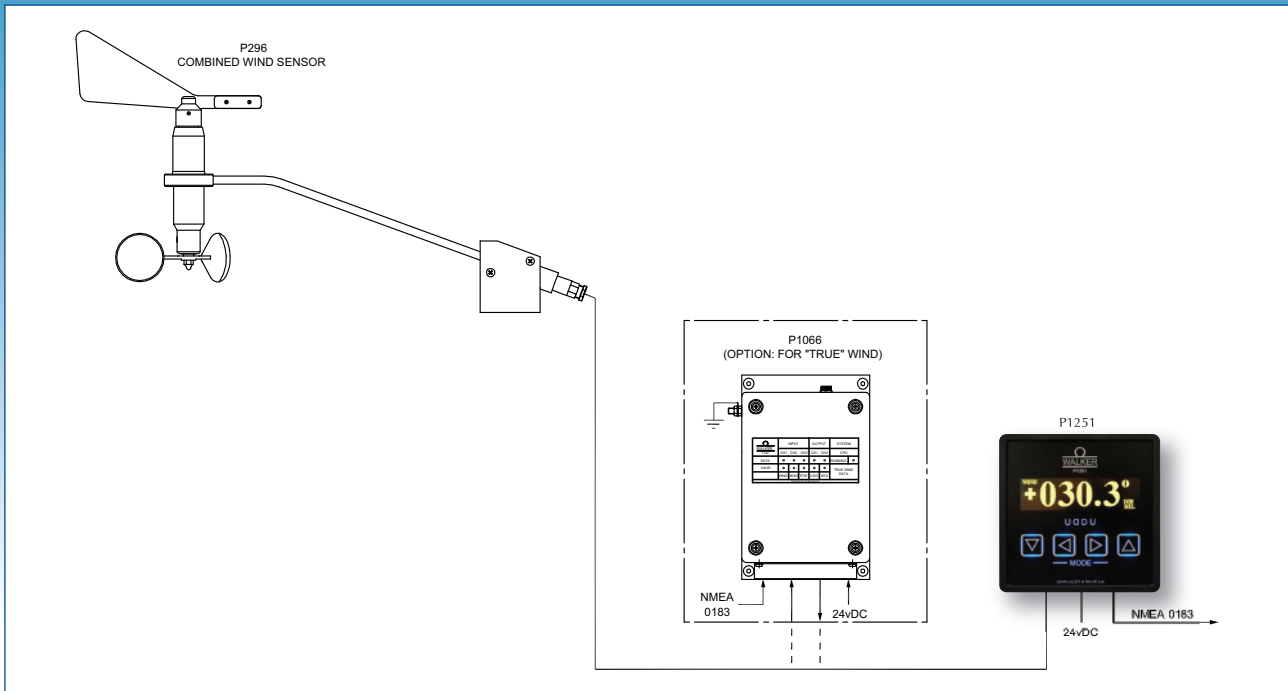

Specification

System

The sensor converts wind speed and direction into serial digital data. Data is displayed by the P1251 Indicator in digital format. The instrument interfaces in NMEA 0183/RS422 to other ship systems. Sentence – MWV

Sensor

Mounting by base flange.

Sealed to IP65 (when correctly mounted)

Weight: 0.92 Kg

plus 3kg for 40 metre cable and connector assembly.

Indicator

Standard DIN 43700 case; 96 x 96 mm – depth 62.5mm

Weight: 1.2 Kg

Mounted by panel clips or drilled frame supplied.

Cables: 4.5 to 7 mm dia.

Controls: Illumination

Lamp Test

Select Units, to display signals if available.

NMEA0183, VHW, VBW, VTG, VLW,

MWV, MWD, XDR, MTW, HDG, HDT, HDM.

Front panel splash proof when installed correctly.

CE Indicator Type Approved to
EMC European Directive IEC 60945

In accordance with our policy of continuous development, changes may be made from time to time without prior notice.

Walker 2030 Mk2 Wind Speed & Direction System, using P1251 Combined Sensor Unit

System Parameters

Input voltage: 24v DC 40mA

Wind Speed Measurement

Range 0–100 knots

Accuracy +/- 0.5 knots

Resolution 0.1 knots

Wind Direction measurement

Range 0° – 359°

Accuracy +/- 3°

Resolution 0.1°

Environmental

Operating Temperature

Sensor -35 °C to +70 °C

Indicator 0 °C to +55 °C

Storage Temperature

Sensor -40 °C to +90 °C

Humidity <5% to 100%

Option:

2030 Mk2 Wind Speed
& Direction True System,
P1066 True Wind
Interface Unit



LILLEY & GILLIE
EQUIPMENT

Directing International Shipping since 1812

Tel: +44(0)191 270 4260
Fax: +44(0)191 257 6175
E-Mail: sales@jlgmarine.com
Web: www.jlgmarine.com